


BATTERY INSULATOR BOOTS

Battery terminal insulators increase product safety by preventing electrical shorts and shock, avoiding injury and potential liability. Additionally, the use of terminal insulators assures customers that your product was designed with the highest standards of quality. Protective boots and caps extend battery life by protecting against corrosion. Constructed from durable, heavy-duty PVC. Available in straight, marine, and alternator type.


FEATURES:

- Recommended per ABYC E-10.6(1)
- Polyvinyl Chloride 105°C
- Meets Coast Guard 33 CFR Part 183 Subpart 1
- Meets S.A.E. J378 and J1128 (Low voltage caps)
- Meets UL 94 V2 Rated 105°C


ABYC recommends that "Except for circuits provided with over current protection in accordance with ABYC E-9.11. Continuously energized parts, such as positive battery terminals and both ends of all wires connected thereto, shall be protected to prevent accidental short circuits."



Alternator Type



Straight Type

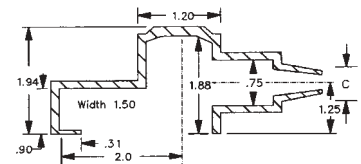

Marine Type

ALTERNATOR TYPE

WIRE RANGE	PART NUMBER	TERMINAL O.D. "A"	POST HEIGHT "B"	CABLE ENTRY "C" MIN/MAX	COLOR	STANDARD PACKAGE
10-6 AWG	TBCA6-R	.48	.75	.30/.50	RED	10, 25, 50
	TBCA6-B	.48	.75	.30/.50	BLACK	10, 25, 50
8-2 AWG	TBCA2-R	.87	1.05	.30/.50	RED	5, 10, 25
	TBCA2-B	.87	1.05	.30/.50	BLACK	5, 10, 25
2-4/0 AWG	TBCA20-R	.87	1.05	.50/.70	RED	5, 10, 25
	TBCA20-B	.87	1.05	.50/.70	BLACK	5, 10, 25
4/0 AWG	TBCA40-R	1.37	1.60	.70/.90	RED	5, 10, 25
	TBCA40-B	1.37	1.60	.70/.90	BLACK	5, 10, 25



STRAIGHT TYPE

WIRE RANGE	PART NUMBER	CABLE ENTRY	COLOR	STANDARD PACKAGE
6-2 AWG	TBCS2-R	.500	RED	5, 10, 25
	TBCS2-B	.500	BLACK	5, 10, 25
2-2/0 AWG	TBCS20-R	.625	RED	5, 10, 25
	TBCS20-B	.625	BLACK	5, 10, 25
4/0 AWG	TBCS40-R	.700	RED	5, 10, 25
	TBCS40-B	.700	BLACK	5, 10, 25



MARINE TYPE

WIRE RANGE	PART NUMBER	CABLE ENTRY "C" MIN/MAX	COLOR	STANDARD PACKAGE
6-2 AWG	TBCM2-R	.30/.50	RED	5, 10, 25
	TBCM2-B	.30/.50	BLACK	5, 10, 25
2-2/0 AWG	TBCM20-R	.50/.70	RED	5, 10, 25
	TBCM20-B	.50/.70	BLACK	5, 10, 25



ORDERING INFORMATION:

Order by standard package.